


Inercia SLIM R Basic



Use:

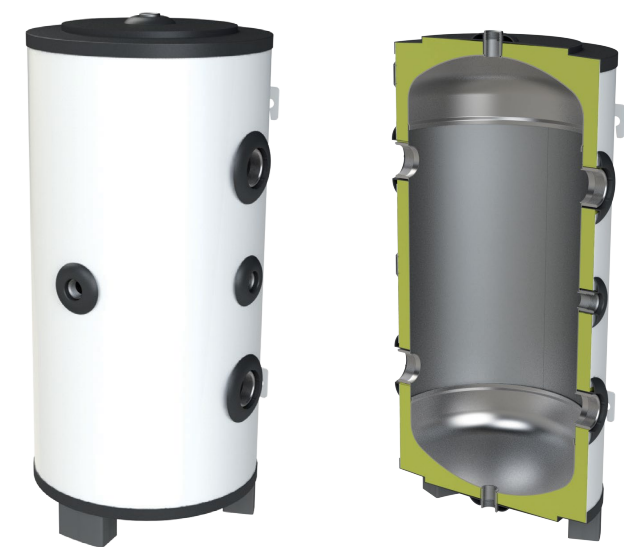

Heating and refrigeration




Heat pump



Other renewable energies



Boiler



Advantages:

- Suitable for **wall (vertical and horizontal) or floor installation.**
- Specially designed for heat pumps and hydraulic separators.
- Can be installed both **inside and outside the home.**
- Brackets for **wall and floor installation included.**
- **3-year warranty**, subject to the manufacturer's terms and conditions.

Models:

- 20 L, 30 L, 40 L, 50 L and 60 L.

Accessories:

- SLIM pair vent (Ceiling installation)




Technical characteristics:

Model	SLIM 20 R BASIC	SLIM 30 R BASIC	SLIM 40 R BASIC	SLIM 50 R BASIC	SLIM 60 R BASIC
Code	2012889	2012888	2012857	2012887	2012853
Capacity [l]	23	30	40	50	60
Maximum pressure	6 bar				
Operating range [°C]	-10 to 100				
Outer finish	White lacquered galvanised steel				
Insulation	Injected rigid polyurethane with a density of 42 kg/m³				
Insulation thickness [mm]	20				
Diameter [mm]	310	310	310	310	310
Height [mm]	561	674	849	1029	1209
Weight when empty [kg]	15.5	17	18.50	20	21.50
Boiler material	Descaled ST37-2 carbon steel				

Buffer tank SLIM R Basic

Dimensions and connections: BUFFER TANK SLIM 30-40-50-60

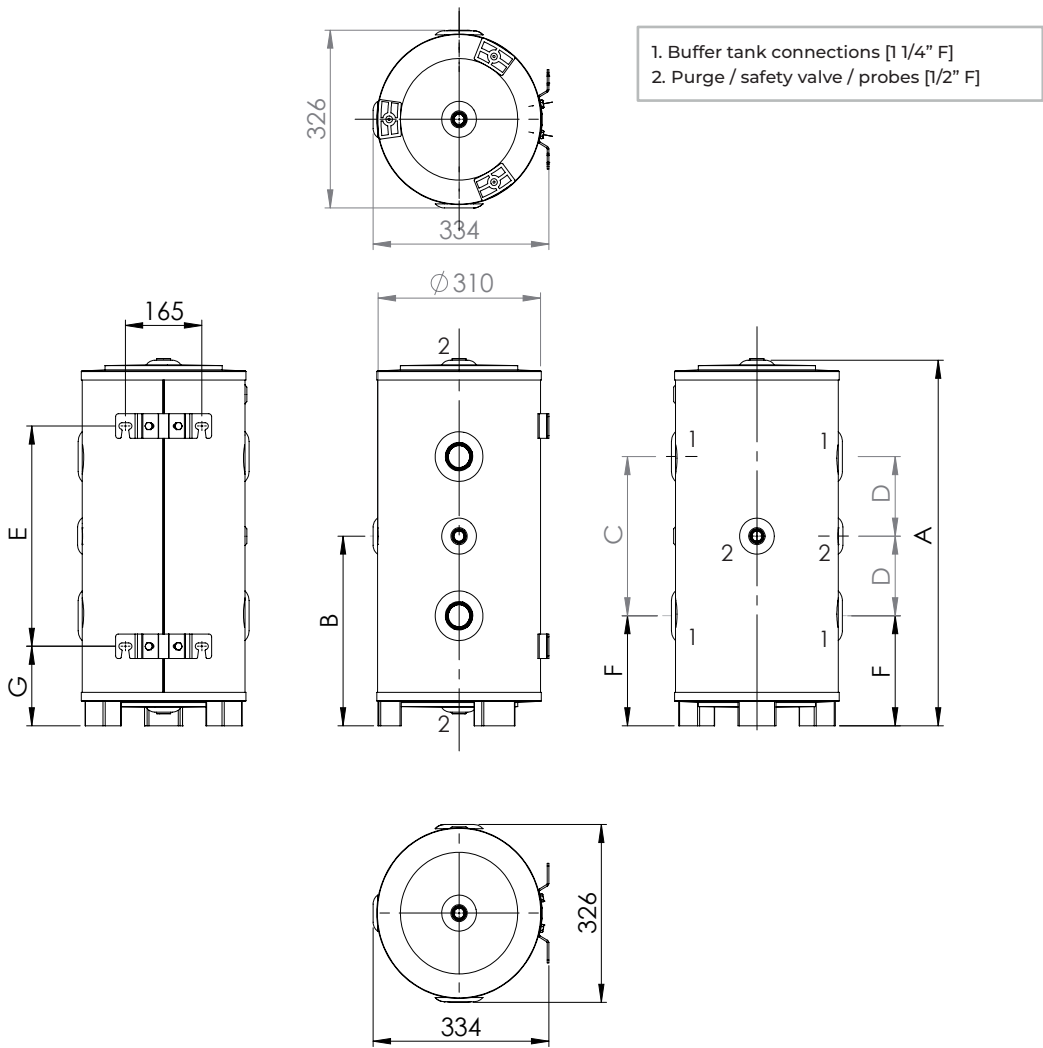

Dimensions [mm]	SLIM 20 R BASIC	SLIM 30 R BASIC	SLIM 40 R BASIC	SLIM 50 R BASIC	SLIM 60 R BASIC
A	561	674	849	1029	1209
B	293	348	435	525	615
C	206	292	467	647	827
D	103	146	234	324	414
E	294	320	440	620	779
F	190	199	199	199	199
G	146	188	215	215	226