

ENAMELLED Classic



Use:



DHW



Other
renewable
energies



Solar
Thermal



Boiler



Advantages:

- **Maximum quality in the enamelled layer** in accordance with DIN 4753-3.
- **80/100 mm insulation** with flexible polyurethane.
- Fitted with **magnesium anode** to protect the unit.
- **5-year warranty.**

Models:

- Vertical 1000L, 1500L and 2000L.


Accessories:

- Heating element
- Magnesium anode

Technical characteristics:

Model	ACUM GV 1000 CLASSIC	ACUM GV 1500 CLASSIC	ACUM GV 2000 CLASSIC
Code	2012787	2012788	2012789
Capacity [l]	1000	1500	2000
Maximum pressure	10 bar		
Maximum temp.	95°C		
Outer finish	Synthetic leather cover		
Insulation	Flexible fireproof polyurethane Density: 15 kg/m³		
Tank protection	Magnesium anode		
Insulation thickness [mm]	80	100	100
Diameter [mm]	1010	1160	1350
Height [mm]	2060	2369	2272
Diagonal	2305	2625	2630
Weight when empty [kg]	219	295	415
Tank material	DIN 4753-3 Enamelled Steel		

ENAMELLED Classic

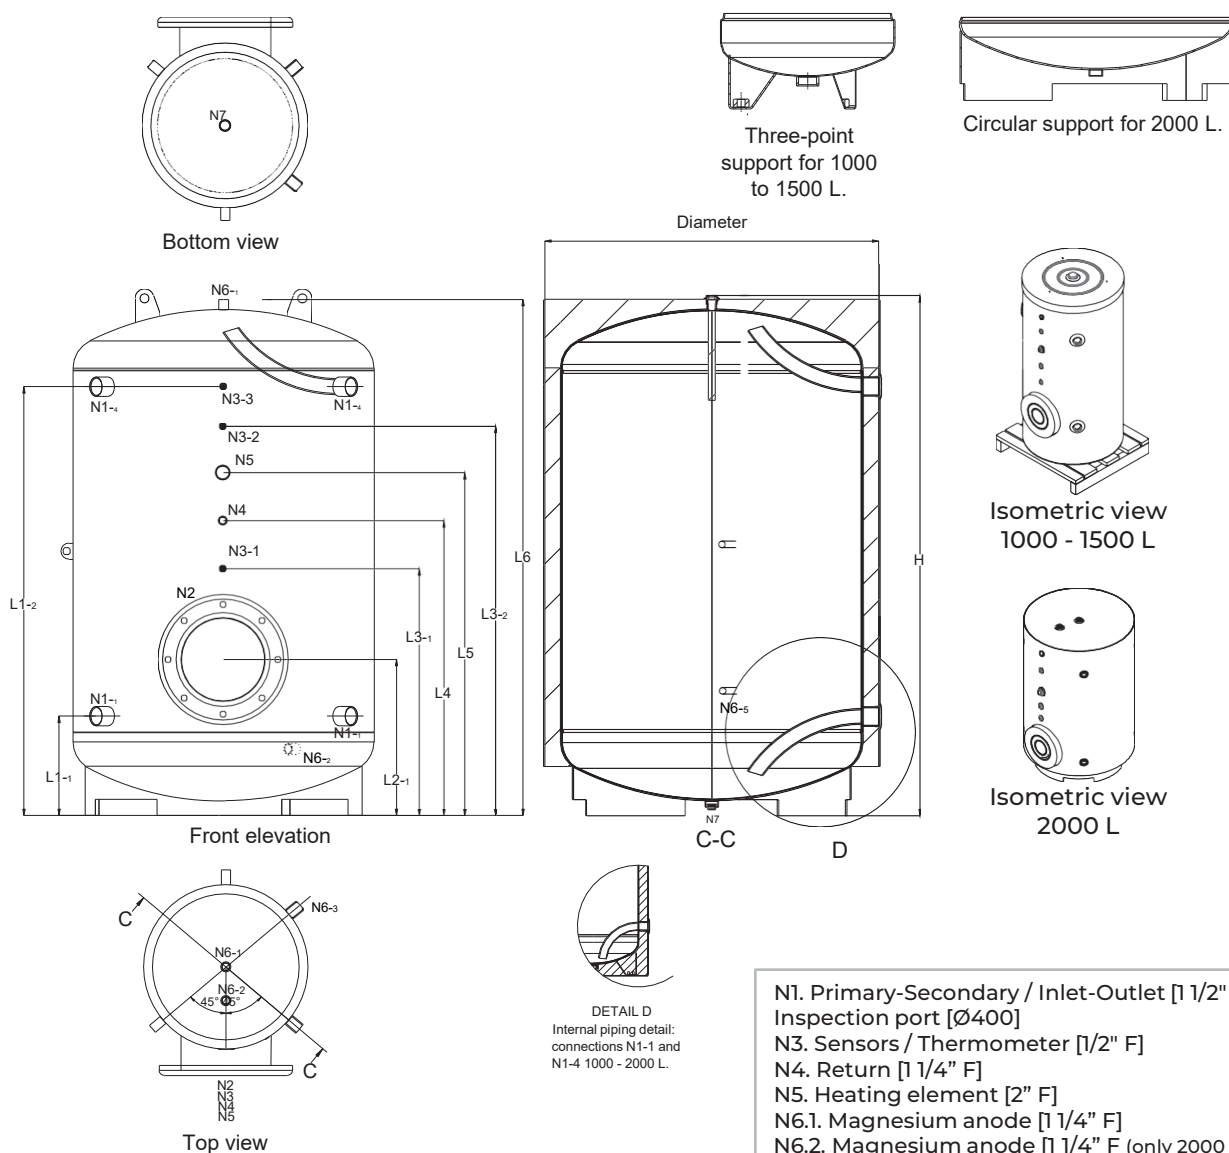

Dimensions [mm]	ACUM GV 1000 CLASSIC	ACUM GV 1500 CLASSIC	ACUM GV 2000 CLASSIC
L1-1	405	443	539
L1-2	1641	1912	1765
L2-1	610	581	668
L3-1	1005	1033	1050
L3-2	1511	1742	1645
L4	1191	1342	1330
L5	1351	1542	1495
L6	2039	2349	2252
H	2060	2369	2272
Diameter	1010	1160	1350