

ENAMELLED Classic




Use:



Domestic installations



DHW



Advantages:

- Enamelled double jacket tank.
 - Includes large diffuser to improve tank stratification .
 - 50 mm insulation with injected rigid polyurethane.
 - Lightest solar panel on the market, allowing it to be handled by a single installer.
 - Greater integration in the home thanks to its ultra-slim design.
 - In the range of ultra-slim collectors, it is the most efficient.
- Steel support frames with Magnelis coating designed for flat and sloping roofs.
- **5-year warranty** subject to the manufacturer's terms and conditions.

Models:

- Thermosiphon 150 L to 300 L


Accessory kit:

- Samba stopper 18
- Stopper 1/2"
- Hex nipple 1/2"
- Samba elbow 18-3/4"
- Sleeve 18-3/4"
- Anti-thermosiphonic valve
- 2 and 8 bar safety valves
- Silicone gasket 3/4"
- Samba connecting sleeves 18
- Flexible connections, pipework and Insulation

Technical characteristics:


Model	COMPAC SUPERECO HD 150 CLASSIC	COMPAC SUPERECO HD 200S CLASSIC	COMPAC SUPERECO HD 300 CLASSIC	COMPAC SUPERECO HD
Code	2032481	2032482	2032483	2032484
Hot Water Tank	HD 150	HD 200	HD 300	HD 300
Capacity (l)	145	190	273	273
Primary vol. [l]	10.36	13.21	18.75	18.75
Outer finish	White enamelled galvanised steel			
Internal circuit	Steel Enamelled at 850°C			
Insulation	Injected rigid polyurethane, thickness 50 mm			
Tank protection	Magnesium anode			
Maximum pressure	Primary 2 bar - Secondary: 8 bar		Primary 1.5 bar - Secondary: 8 bar	
Maximum temperature allowed	95°C			
Diameter [mm]	580	580	580	580
Length [mm]	1092	1342	1812	1812
Solar collector	SuperECO 2000(x1)	SuperECO 2500(x1)	SuperECO 2000(x2)	SuperECO 2500(x2)
Useful solar area [m²]	1.88	2.38	3.76	4.76
Peak power [W] (G=1000 W/m²)	1498	1877	2996	3754
V/A ratio [l/m²]	77.13	79.83	72.61	57.35
Weight when empty [kg]	112	136	174	186
Support Frame	DX51 steel profiled L37x2.5 treated with Magnelis for outdoor use			

ENAMELLED Classic

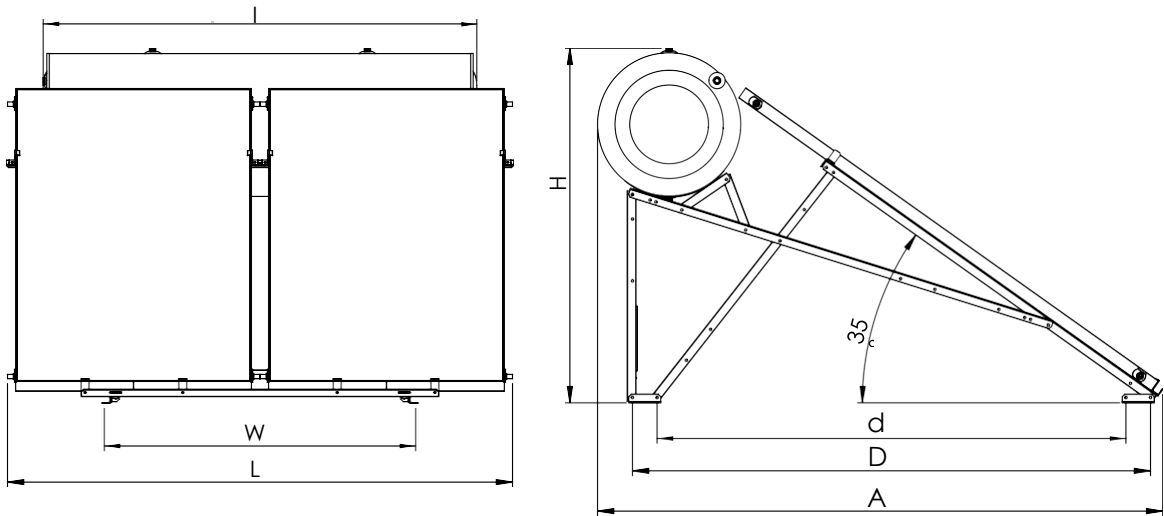

COMPAC SYSTEM	L	I	W	A	H	D	d
SuperECO 150 HD	1050	1092	856	2297	1441	2105	1905
SuperECO 200S HD	1300	1342	936				
SuperECO 300 HD	2060	1812	1256				
SuperECO 300S HD	2540	1812					

Assembly

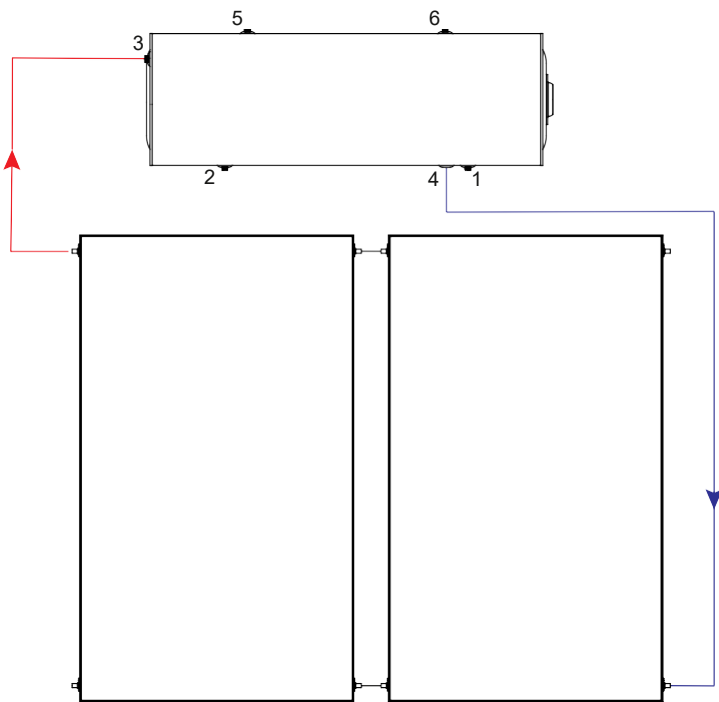

- 1. Water inlet [1/2" M].
- 2. DHW outlet [1/2" M].
- 3. Collectors return [3/4" M].
- 4. Collectors outlet [1/2" F].
- 5. 2 bar primary safety valve [1/2" M].
- 6. Filling [1/2" M].

Note: For more information, consult the equipment's installation manual.