


INOX Premium



Use:



DHW



Advantages:

- Made with high-quality **Duplex 2205** stainless steel.
- Manufactured using **inerting and passivation** processes, helping to preserve the properties of the stainless steel and reducing the risk of surface oxidation.
- No magnesium anode, reducing maintenance.
- Brackets for **wall and floor installation included**.
- **Smart digital thermostat**, learns consumption habits to save energy.
- Optional **1500 W/2500 W titanium** heating element.
- 160 mm inspection flange on 300 l-litre models.
- **10-year warranty**, subject to the manufacturer's terms and conditions.

Models:

- Wall 50 L to 150 L and floor 150 L to 300 L.

Accessories:

- 2050037: 1 1/4" 1500 W titanium heating element
- 2042643: 1 1/4" 2500 W titanium heating element, folded
- 2050044: Digital thermostat

Technical characteristics:


Model	TERMO 50 PREMIUM M	TERMO 80 PREMIUM M	TERMO 100 PREMIUM M	TERMO 120 PREMIUM M	TERMO 150 PREMIUM M	TERMO 150 PREMIUM	TERMO 200 PREMIUM	TERMO 300 PREMIUM
Code	2052518	2052519	2052520	2052521	2052522	2052523	2052524	2052525
Installation*	Vertical wall mounted					Vertical floor mounted		
Capacity [l]	47	76	96	116	150	150	190	280
Heating element	1500 W titanium (2050037)						3000 W titanium (2042643)	
Controller	Smart digital thermostat (2050044)							
Maximum pressure	8 bar							
Outer finish	Black lacquered galvanised steel							
Insulation	Injected rigid polyurethane. Thickness 30 mm Density: 42kg/m³							
Tank protection	Not necessary							
Diameter [mm]	540	540	540	540	540	540	540	540
Height [mm]	485	655	745	855	1050	1087	1307	1857
Weight when empty [kg]	17	22	26	29	31	30	38	49
Boiler material	Duplex 2205 stainless steel							

*Can be fitted inside the home.


INOX Premium

Dimensions and connections


Wall version (100-150)

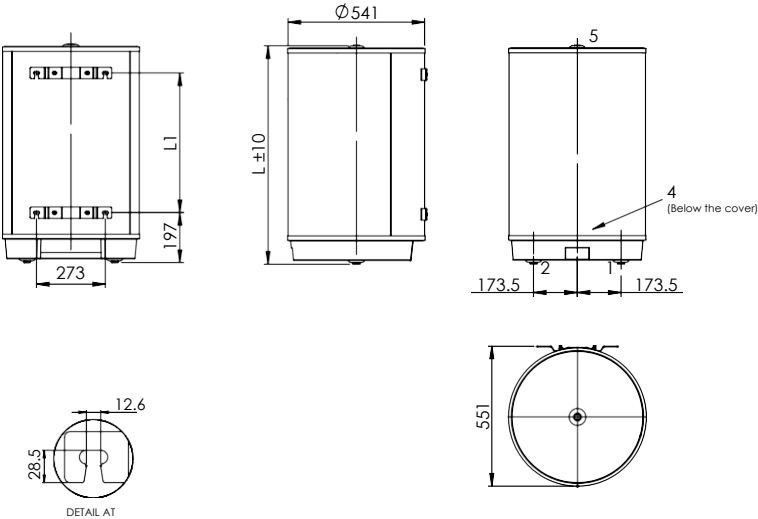


Floor version (150-200)

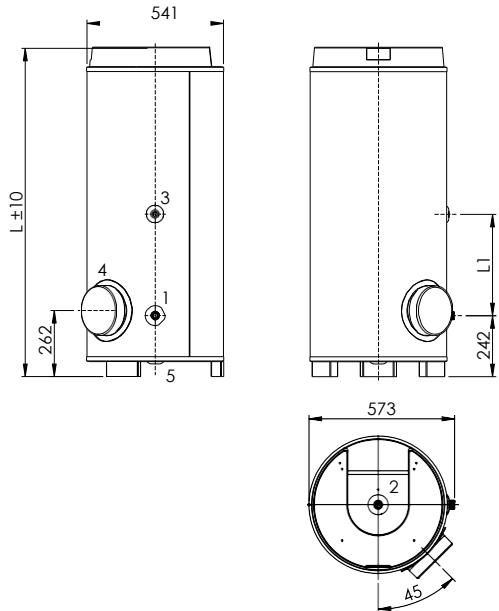

Floor version (300)

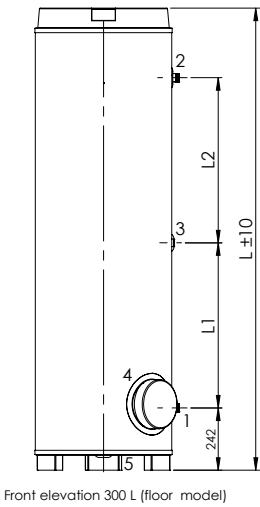

Front elevation 300 L (floor model)

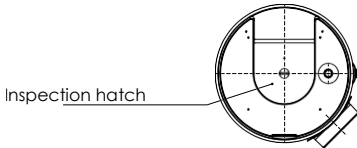

- 1. Cold inlet / safety valve [3/4" M (wall models) - 1" M (floor models)]
 - 2. Hot outlet [3/4" M (wall models) - 1" M (floor models)]
 - 3. Probe / recirculation [1/2" F] in floor models only
 - 4. Heating element [1"-1/4 F]
 - 5. Free (Wall 50L-150L), drain (Wall 50L-150L) [1/2" F]
- *Drain (Wall 50L-150L): consult manual

Dimensions [mm]	TERMO 50 PREMIUM M	TERMO 80 PREMIUM M	TERMO 100 PREMIUM M	TERMO 120 PREMIUM M	TERMO 150 PREMIUM M	TERMO 150 PREMIUM	TERMO 200 PREMIUM	TERMO 300 PREMIUM
L	492	661	752	862	1052	1087	1307	1832
L1	196	365	456	566	756	292	402	655
L2	-	-	-	-	-	-	-	655