


INOX Comfort



Use:



DHW



Advantages:

- Made with high-quality **Duplex 2202 stainless steel**
- Manufactured using **inerting and passivation** processes, helping to preserve the properties of the stainless steel and reducing the risk of surface oxidation.
- **No magnesium anode**, reducing maintenance.
- Can be installed both **inside and outside the home**. Brackets for **wall and floor installation included. 40 mm**
- **insulation** with injected rigid polyurethane.
- **7-year warranty**, subject to the manufacturer's terms and conditions.

Models:

- Horizontal 80 L up to 150 L.

Accessories:


- 2050037: 1 1/4" 1500 W titanium heating element
- 2040314: Thermostat for heating element

Technical characteristics:

Model	TERMO 80 COMFORT H	TERMO 100 COMFORT H	TERMO 120 COMFORT H	TERMO 150 COMFORT H
Code	2052453	2052454	2052455	2052456
Installation	Horizontal outdoor installation			
Capacity [l]	76	96	116	150
Heating element	1500 W titanium (2050037)			
Controller	Adjustable analogue thermostat (2040314)			
Maximum pressure	8 bar			
Outer finish	Black lacquered galvanised steel			
Insulation	Injected rigid polyurethane. Thickness 40 mm Density: 42 kg/m³			
Tank protection	Not necessary			
Diameter [mm]	560	560	560	560
Height [mm]	620	710	820	1010
Weight when empty [kg]	24	27	30	31
Boiler material	Duplex 2202 stainless steel			

INOX Comfort

Dimensions and connections

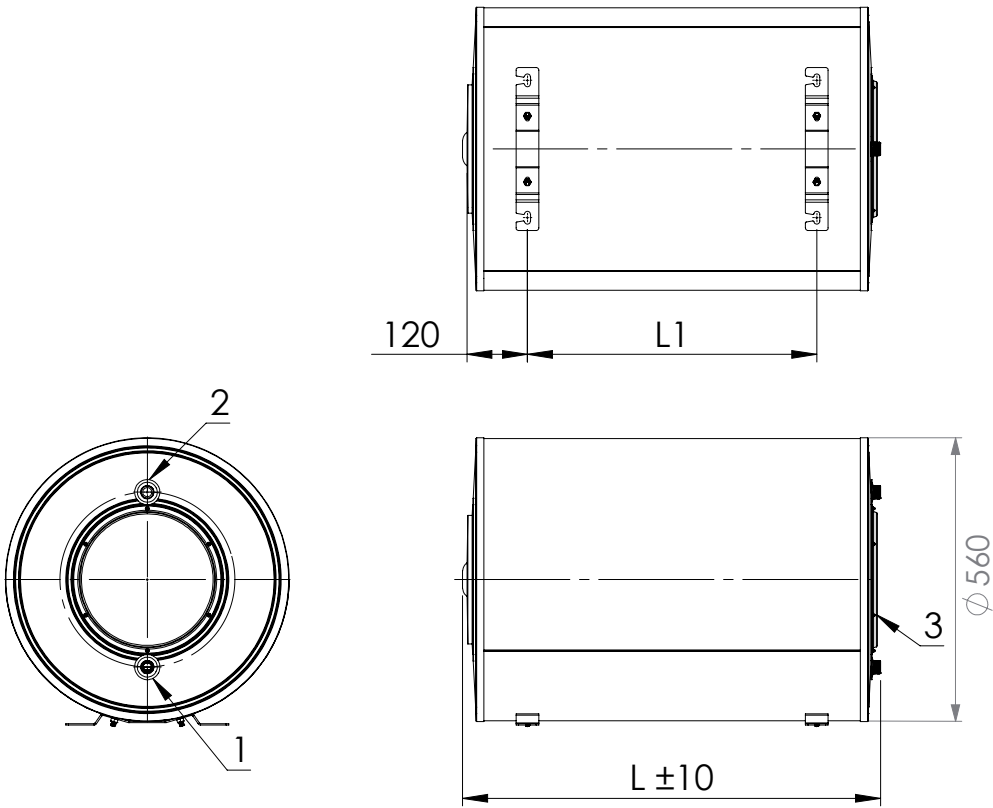

- 1. Cold inlet / safety valve [3/4" M]
- 2. Hot outlet [3/4" M]
- 3. Heating element [1"-1/4 F]

Dimensión [mm]	TERMO 80 COMFORT H	TERMO 100 COMFORT H	TERMO 120 COMFORT H	TERMO 150 COMFORT H
L1	374	464	574	764
Length, L	620	710	820	1010